



Weather Protection Oil

1 l - 2,5 l - 10 l



Primer and finishing coat for facades, fences, playground equipment and wooden structures outdoors, for absorbent, sanded, planed and rough-sawn woods.

- Crystal Clear Ingredient Declaration (www.biofa.de)
- Made from natural raw materials
- With mineral UV-protective agents
- Colorless (2043) and colored (20431)
- Penetrates well into wood
- Protects against moisture
- Revitalizes and preserves the natural structure of the wood
- Delays the typical graying process
- With film protection against fungal and algae attack

Properties:

Transparent natural resin-oil blend for outdoor wood surfaces exposed to weather. It rejuvenates and maintains the natural structure of the wood, protects against moisture and inhibits the typical graying. For Outdoor Use Only.

BIOFA Weather Protection Oil can be tinted ex works in many shades according to the BIOFA Eluc color chart.

As primer or maintenance product for sanded, planed, and rough hewn wood. etc. Not suited for building components such as windows or doors.


The weather protection oil contains a film preservation against fungus and algae at ecologically acceptable levels. Depending on the biological load, however, growth can occur despite treatment. Roof eaves, in particular, are susceptible to fungal growth, depending on construction and design. Avoid condensation.

Attention! BIOFA products for outdoor applications are intended for surfaces designed for its intended purpose. Horizontal surfaces require at least 15° slope to avoid puddling (DIN 68800-2(4)). Footings

of vertical wooden elements must be sealed to prevent water from rising. For optimal protection, clean and retreat at least once annually with BIOF Weather Protection Oil.

Ingredients:

Aromatic-free, highly-purified white spirit, castor oil colophony resin blend, castor oil, wood oil stand oil, soy oil, modified castor oil colophony resin blend, various clays, titanium oxide, color pigments depend on hue, zinc oxide, plant based wetting and anti-foaming agents, antioxidant, zirconium-cobalt-polymer drying agent, manganese drying agent, 4,5-Dichlor-2-octyl-2H-isothiazol-3-on, 2-OCTYL-2H-ISOTHIAZOL-3-ON (biological surface protection).





Directions for Use:

1. Preparation: Substrates must be dry (max. wood moisture content: 12%), grease-free and clean; clean with BIOFA Thinner 0500 as needed. Thoroughly remove old paint coats.


2. Application: Spray, brush or roll (flat brush with synthetic or mixed fiber bristles, velour roller) 2 coats, allowing 16-24 hours between coats. Pay particular attention to crosscut surfaces. Extreme weather exposure will require 3 coats. Sand between coats with 180-240 grit as needed.

Important: Be sure to test product before proceeding! Mix containers from different batches. Do not process in direct, strong sun exposure.

Technical spraying parameters: Cup pistol: **Nozzle:** 1-1.5mm, at 2-2.5 bar pressure. **Airless: Nozzle:** 0.23-0.28 mm, at 4 bar pressure and material pressure: 80 bar.

3. Equipment cleaning: Clean immediately after use with BIOFA Thinner 0500.

Recommended Equipment:

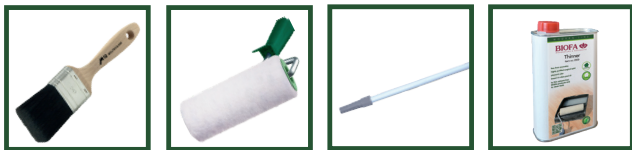

1. 009949 / 009934 Flat brush, professional quality 50 mm / 70 mm for oilbased products

2. 009951 / 009980 / 009982 Varnish roller microfiber 100 mm / 180 mm / 250 mm

3. 009952 / 009996 / 009954 Roller bracket 100-120 mm / 180-200 mm / 250-270 mm

4. 009973 Tool handle

5. 0500 BIOFA Thinner for cleaning the working equipment

Drying:

The oil is dry after and can be further painted after 16-24 hrs. (20°C / 50-55 % relative humidity).

Consumption/yield per coat:

60-80 ml/m² or 12-16 m²/l for the first coat. 30-40 ml/m² or 25-30 m²/l for the second and third coats. Consumption will be significantly higher on rough hewn wood.

Storage:

Keep cool, dry and properly sealed. May form skin. Remove before next use. Screen oil as needed!

Disposal:

Discard leftover liquid product according to local regulations. Minor leftovers and soaked processing materials can be dried and disposed in the household waste.

Only recycle fully emptied and cleaned containers. Avoid release into sewers and the environment.

German & EU Waste Classification 08 01 11*

Container:

Colorless: 0,375 l / 1 l / 2,5 l / 10 l metal container

Colored: 1 l / 2,5 l / 10 l metal container

Hazard warnings and safety instructions:

Poisonous for water organisms with long-term effect. Contains Cobaltbis(2-ethylhexanoat); 4,5-Dichlor-2-octyl-2H-isothiazol-3-on und 2-Octyl-2H-iso-thiazol-3-on. Can cause allergic reactions (Allergy information +49 7164-9405-0).

Soak processing materials and contaminated clothing in water, then allow to dry on non-combustible ground - (risk of spontaneous combustion!). The product itself is not auto-ignitable. Keep away from children. Read label before use. Avoid contact with eyes, skin and clothing. Wash from eyes with water or skin with soap and water. Keep the label handy when seeking medical help. Only use in properly ventilated areas when applying or drying. Do not inhale vapor/aerosol. When sprayed, ensure adequate ventilation and A2/P2 combination respiratory protection and goggles. Wear fine P2 particulate mask when sanding!

The natural ingredients have a characteristic odor! This product is not a biocide. Contains 4,5-Dichlor-2-octyl-2H-isothiazol-3-on (CAS-Nr.: 64359-81-5) and 2-Octyl-2H-isothiazol-3-on (CAS-Nr.: 26530-20-1).

Read the Safety Datasheet (available online or upon request).

VOC labeling law. Decopaint directive and ChemVOCFarbV:

EU threshold (Cat. A/e): 400 g/l (2010)

2043, 20431 contain max. 350 g/l VOC

GISCODE: BSL10